



# Technical Specifications

## Microcell

**Bolt-on, strain gauge, sensor technology for measuring inventory weights on vessels with pipe leg supporting structures.**

When you need weight inventory you want to use a weighing system. With the Microcell — a highly sensitive and thermally stable semiconductor strain gauge sensor, KM pioneered bolt-on technology for measuring the contents of a wide range of bulk storage vessels. This sensor is still the standard way to measure the weight-induced strain in a vessel with a pipe leg support structure.

When two Microcells are bolted on opposite sides of the vertical pipe legs of a vessel, it converts the vessel into a weighing system. Adding weight to a vessel compresses the gauge, changing the Microcells resistance which produces an electrical output proportional to the material weight change.

The Microcell is quickly and easily installed while the vessel is still in productive use. An empty vessel is not required for installation or calibration. For use on existing vessels with pipe legs, the Microcell is a cost-effective weighing solution compared to having to modify vessels for other types of weighing sensors.

In combination with your existing vessels, the versatility of the Microcell can supply a cost effective, easy to install, easy to maintain, highly reliable industrial strength weighing system. For cost and performance, nothing can compare with the Microcell when weight is needed and weight is wanted.



## Features & Benefits

### **Bolt-on Technology**

Creates a weighing system by mounting Microcells to the vessel's pipe leg supports.

### **Simple Mounting**

No specialized tools for installation.

### **Uses Existing Vessel Structure**

No need to empty vessel or take out of production to install or service.

### **75 years MTBF**

Unprecedented long-term reliability.

## Specifications:

### Mechanical

#### Stress Level - 3-inch Microcell:

Maximum: 10,000 psi (7.0 kg/mm<sup>2</sup>)

Recommended\*: 5,000 ± 2,500 psi (3.5 ± 1.75 kg/mm<sup>2</sup>)

#### Stress Level - 2-inch Microcell:

Maximum: 15,000 psi (10.5 kg/mm<sup>2</sup>);

Recommended\*: 7,500 ± 3,750 psi (5.3 ± 2.6 kg/mm<sup>2</sup>)

\*Consult factory for stress outside recommended range

**Fatigue Life:** > 20 million cycles; load and unload at 0 to 5,000 psi (0 to 3.5 kg/mm<sup>2</sup>)

### Electrical

**Excitation Voltage:** Standard 12 VDC, ±5%; maximum 30 VDC

**Excitation Current at 12V:** 4.0 mA at 0° F (-18° C) to 2.7 mA at 100° F (+38° C)

**Insulation Resistance:** 2M ohms

**Strain Gauge to Sensor Frame Breakdown Voltage:** >500 VDC

#### Red-to-White & Black-to-White Resistance 3-inch Microcell:

Standardized: 8.50K ± 200 ohms at 70° F (21° C)

Non-Standardized: 2.0K ± 200 ohms at 70° F (21° C)

#### Red-to-White & Black-to-White Resistance 2-inch Microcell:

2.0K ± 200 ohms at 70° F (21° C)

### Output (for 12V excitation)

#### Sensitivity - Carbon Steel 3-inch Microcell:

70 mV ± 1%/1,000 psi (70 mV ± 1%/0.7 kg/mm<sup>2</sup>)

#### Sensitivity - Carbon Steel 2-inch Microcell:

56 mV ± 1%/1,000 psi (56 mV ± 1%/0.7 kg/mm<sup>2</sup>)

**Zero-Strain Output:** 0 mV ± 25 mV

**Nonlinearity:** ±0.1% of full-scale output

**Repeatability & Hysteresis:** 0.05% of full-scale output

#### Output Impedance - 3-inch Microcell:

Standardized: 7.5K ± 75 ohms at 70° F (21° C)

Non-Standardized: 1000 ± 100 ohms at 70° F (21° C)

#### Output Impedance - 2-inch Microcell:

1000 ± 100 ohms at 70° F (21° C)

### Environmental

**Rating:** Designed for rugged, outdoor applications

**Temperature Range - Operational:** -30° to +150° F (-34° to +66° C)

**Temperature Range - Storage:** -30° to +150° F (-34° to +66° C)

#### Temperature Range - Compensated:

Standard: 0° to +100° F (-18° to +38° C)

Mid: +50° to +150° F (+10° to +66° C)

**Temperature Effects - Sensitivity Change:** 0.02%/° F (0.036%/° C), in compensated temperature range

**Temperature Effects - Zero Shift:** ±5 mV/100° F (±5 mV/56° C), in compensated temperature range

### Physical

**Weight:** 3 oz (90 gm)

**Steel Base:** AISI 1018 carbon steel matched to vessel leg material A36 (Consult factory for aluminum or stainless steel vessel leg support)

**Cable:** 3-conductor, 22 gauge, unshielded

**Cable Length:** 5.5' (1.7m)

### Options and Accessories

**3-inch Microcells:** standardized or non-standardized

version; temperature compensated for standard or mid-temperature ranges


**Junction Box:** plastic or stainless steel version

**KM Test Meter:** to simplify sensor installation

**Aluminum-Base Microcells:** for aluminum support legs, consult factory

**Stainless Steel Base Microcells:** for stainless steel support legs, consult factory

### Installation Hardware

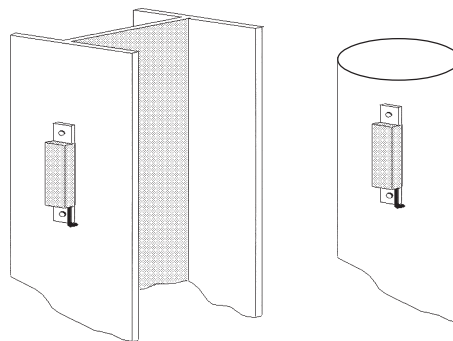

P/N 97-7026-01 Rev C

Specifications subject to change without notice.  
©2004 KM Corporation. All rights reserved.  
Microcell is a trademark of Kistler-Morse Corporation.

KM is represented in your area by:



WORLD HEADQUARTERS

150 Venture Boulevard  
Spartanburg, SC 29306 USA

**1.800.426.9010**

tel: 864.574.2763

fax: 864.574.8063

kistlermorse.com

venture  
MEASUREMENT